


525A2 CMO	1 043 01 0	540R2 CMO	1 04902 6
530R2 CMO	1 04501 7	550R2 CMO	1 051 01 4
535A2 CMO	1 047 00 6		

Offers control via power switching

Technical features



Voltage Supply	120V AC, 60Hz	Temperature Working Range	14°F to 104°F (-10°C to 40°C)
Index Protection Rating	IP44	Insulation Class	Class 1 for 120V
Limit Switch Type	Rapid Adjustment (RA) (includes manual override)		
Limit Switch Capacity	34 Turns		

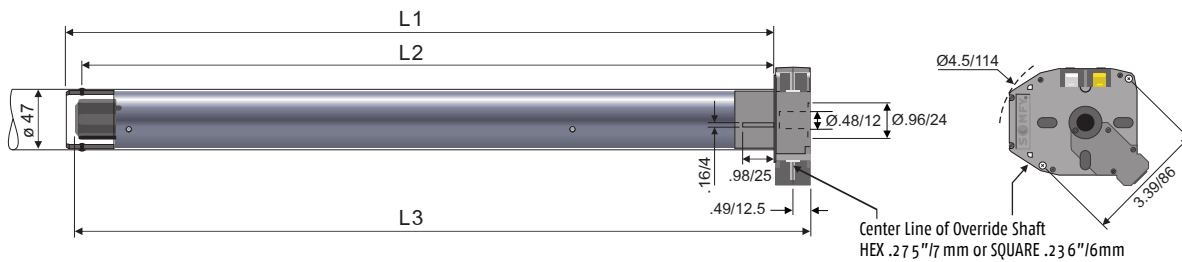

Performances	525A2 CMO	530R2 CMO	535A2 CMO	540R2 CMO	550R2 CMO
Torque	25 Nm	30 Nm	35 Nm	40 Nm	50 Nm
Nominal Voltage	120V/60Hz				
Rated Current	1.6A	1.5A	2.1 A	1.8A	2.1 A
Speed	20 rpm	14 rpm	20 rpm	14 rpm	14 rpm
Thermal Protection	5 minutes				

Dimensions	525A2 CMO	530R2 CMO	535A2 CMO	540R2 CMO	550R2 CMO
L1	23.39 in (594 mm)	23.39 in (594 mm)	26.14 in (664 mm)	26.14 in (664 mm)	26.14 in (664 mm)
L2	22.80 in (579 mm)	22.80 in (579 mm)	25.55 in (649 mm)	25.55 in (649 mm)	25.55 in (649 mm)
L3	23.90 in (607 mm)	23.90 in (607 mm)	26.65 in (677 mm)	26.65 in (677 mm)	26.65 in (677 mm)
Cable Length	6ft (1.8 m)				

Optional cables available in 6ft, 12ft, 24ft.

Type of cable

Wired
120 V / 60 Hz
4 conductor cable

